



MASTERColour CDM-T Elite MW



CDM ELITE TMW 315/930/U/O EU

The medium wattage lighting system that gives superior, longer-lasting white light for both indoor and outdoor use

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing, except for protected versions with PGZX18 cap, which are designed for open luminaires (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	PGZX18
Operating Position	UNIVERSAL [Any or Universal (U)]
Features	Protected (P)
Flux measurement reference	Sphere
Life to 50% Failures (Nom)	30.000 hour(s)

Light Technical	
Color Code	930 [CCT of 3000K]
Luminous Flux	36,200 lm
Color Designation	Warm White (WW)
Saturated Red (R9)	50
Chromaticity Coordinate X (Nom)	0.434

Chromaticity Coordinate Y (Nom)	0.398
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (Rated) (Min)	105 lm/W
Luminous Efficacy (rated) (Nom)	115 lm/W
Color rendering index (CRI)	90
Arc Length O (Nom)	16 mm

Operating and Electrical	
Power Consumption	315.9 W
Voltage (Nom)	100 V

MASTERCLOUR CDM-T Elite MW

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	T12
Net Weight (Piece)	200.000 g


Approval and Application

Energy Efficiency Class	F
Mercury (Hg) Content (Max)	28 mg
Energy Consumption kWh/1000 h	316 kWh
EPREL Registration Number	473300

Product Data



Order product name	CDM ELITE TMW 315/930/U/O EU
Full product name	CDM ELITE TMW 315/930/U/O EU
Full product code	871829113956000
Order code	928601167131
Material Nr. (12NC)	928601167131
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900862133
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291139577

Dimensional drawing



Product	D	D	C
CDM ELITE TMW 315/930/U/O EU	1.5 inch	38 mm	193 mm

Photometric data

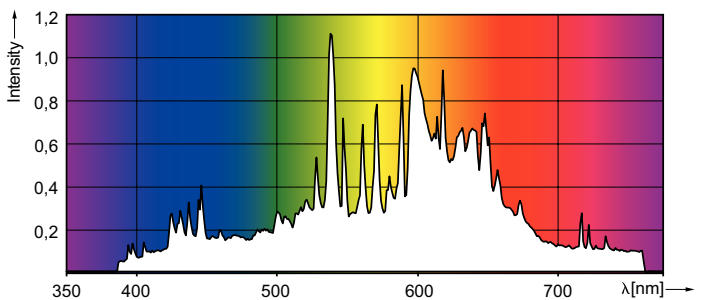
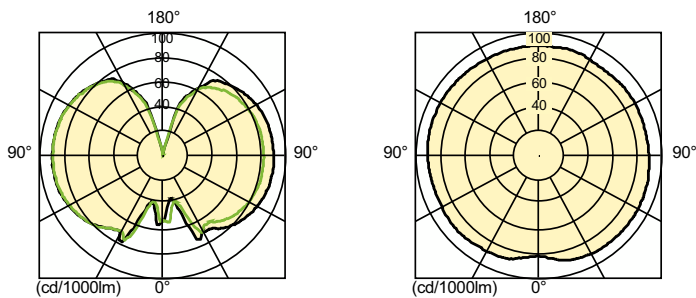


Light Distribution Diagram - CDM ELITE TMW 315/930/U/O EU

Spectral Power Distribution Colour - CDM ELITE TMW 315/930/U/O EU

MASTERCcolour CDM-T Elite MW

Lifetime

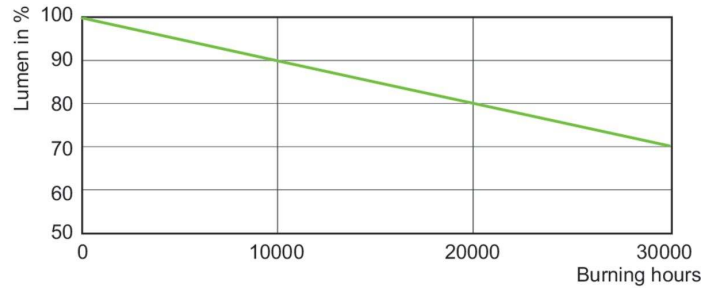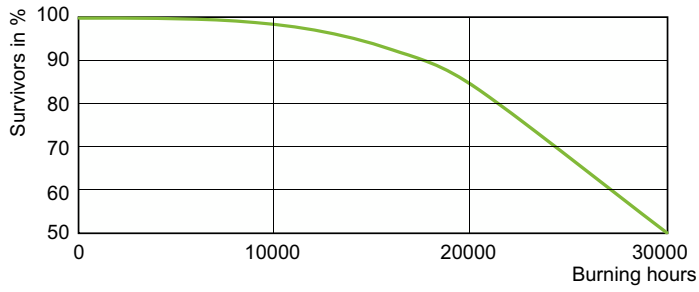

LDLE_D-CDM-T_315W_942_930-Life expectancy diagram

Lumen Maintenance Diagram - CDM ELITE TMW 315/930/U/O EU

