



# Daikin Altherma high temperature split Technical Data

EPVX10A4V /  
EPVX10A9W /  
EPVX14A4V /  
EPVX14A9W





# TABLE OF CONTENTS

## EPVX10A4V / EPVX10A9W / EPVX14A4V / EPVX14A9W

---

1	<b>Features</b>	4
	EPVX10A4V, EPVX10A9W, EPVX14A4V, EPVX14A9W	4
2	<b>Specifications</b>	5
3	<b>Electrical data</b>	13
4	<b>Combination table</b>	14
5	<b>Dimensional drawings</b>	15
6	<b>Centre of gravity</b>	16
7	<b>Piping diagrams</b>	17
8	<b>Wiring diagrams</b>	18
	Notes & Legend	18
	Wiring Diagrams - Hydro Module	19
	Power Supply, Back-up Heater	23
9	<b>External connection diagrams</b>	24
10	<b>Installation</b>	26
	Installation Method	26
11	<b>Hydraulic performance</b>	27
	Static Pressure Drop Unit	27

# 1 Features

1 - 1 EPVX10A4V, EPVX10A9W, EPVX14A4V, EPVX14A9W

## Floor standing air to water heat pump for heating, cooling and hot water

1

- › New intuitive MMI 5» touchscreen for better user experience
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Integrated back-up heater of 4.5 or 9 kW



Guaranteed operation down to -28°C



Onecta app (optional)



Online controller

# 2 Specifications

## 2 - 1 Specifications

Technical specifications					EPVX10S18A4V		EPVX10S23A4V		
Heater capacity	Step 3			kW			4.5		
Casing	Colour			White					
	Material			Precoated galvanized steel + plastic					
Dimensions	Unit	Height	mm	1,650		1,850			
		Width	mm	595					
		Depth	mm	625					
	Packed unit	Height	mm	1,820		2,020			
		Width	mm	696					
		Depth	mm	680					
Weight	Unit			kg	94		111		
	Packed unit			kg	109		126		
Packing	Material			Wood / Carton / PE wrapping foil					
	Weight			kg	14				
Pump	Type			Grundfos UPM4XL LIN 25-90					
	Nr of speeds			LIN					
	Power input			W	90				
Water side Heat exchanger	Water flow rate	Min.	l/min			22 (1)			
		Max.	l/min			29			
Expansion vessel	Volume			l	8				
	Max. water pressure			bar	3				
	Pre pressure			bar	1				
Water filter	Diameter perforations			mm	0.8				
	Material			Resin / Stainless steel					
Water filter Main Zone	Diameter perforations			mm	0.8				
	Material			Plastic / Copper - brass - stainless steel					
Tank	Name			Stainless steel domestic hot water tank 180 l		Stainless steel domestic hot water tank 230 L			
	Water volume			l	180		230		
	Material			Stainless steel (EN 1.4521)					
	Maximum water temperature			°C	0				
	Maximum water pressure			bar	10				
	Insulation	Material			Polyurethane foam				
		Heat loss	kWh/24h	1.2 (5)		1.4 (5)			
	Standing heat loss	S	W	50		58			
	Storage volume	V	l	180		220			
	Corrosion protection			Pickling					
	Energy efficiency class			B					
General	Supplier/	Name or trademark			Daikin Europe N.V.				
	Manufacturer details	Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium				
3-way valve	Coefficient of flow (kV)	Space heating	m <sup>3</sup> /h			10			
		Domestic hot water tank	m <sup>3</sup> /h			10			
Water circuit	inch			in	G 1" (female)				
	Piping material			Stainless steel					
	inch			in	1"				
	inch			in	1"				
	Safety valve			bar	3				
	Manometer			Digital					
	Drain valve / fill valve			No					
	Shut off valve			Yes					
	flowswitch			No					
	Air purge valve			Yes					
	Pressure	Heating	Max.	bar	3				
	Minimum water volume in the system for cooling			l	25 (2)				
	Minimum water volume in the system for heating			l	0 (2)				
Water circuit - Domestic hot water side	Piping material			Stainless steel					
	Piping connections	Cold water in / Hot water out		inch	G 3/4" FEMALE				
Sound power level	Nom.			dBA	45 (6)				
Sound pressure level	Nom.			dBA	31 (7)				
Operation range	Heating	Ambient	Min.	°C	0 (3)				
			Max.	°C	0 (3)				
		Water side	Min.	°C	0 (3)				
			Max.	°C	0 (3)				
	Indoor installation	Ambient	Min.	°CDB	5				
			Max.	°CDB	35 (4)				
	Cooling	Ambient	Min.	°CDB	0 (3)				
			Max.	°CDB	0 (3)				
		Water side	Min.	°C	0 (3)				
			Max.	°C	0 (3)				
	Domestic hot water	Water side	Min.	°C	0 (3)				
			Max.	°C	0 (3)				

# 2 Specifications

## 2 - 1 Specifications

2

Technical specifications				EPVX10S18A4V	EPVX10S23A4V
Installation place		Indoor			
Safety devices		Item	01	Thermal cut out	
Electrical specifications				EPVX10S18A4V	EPVX10S23A4V
Power supply		Name		See note 8	
		Phase		1~/3~	
		Frequency		50	
		Voltage		230/400	
		Voltage range		10	
		Min.		10	
		Max.		10	
IP class		IP		IP X0B	
Electric heater		Power supply		4V	
		Phase		1~ / 3~	
		Frequency		50	
		Voltage		230/400	
		Current		Minimum Ssc value	
		Recommended fuses		Equipment complying with EN/IEC 61000-3-12	
		Voltage range		0 (9)	
		Min.		10	
		Max.		10	
Wiring connections		Communication cable		Quantity: 3+GRD	
		Remark		1.5 mm <sup>2</sup>	
		Electric meter		Quantity: 2	
		Remark		Minimum 0.75 mm <sup>2</sup> (16VDC pulse detection) ..	
		Preferential kWh rate power supply		Quantity: 2	
		Remark		Power: 2	
		Domestic hot water pump		Quantity: 2	
		Remark		Minimum 0.75 mm <sup>2</sup> (2A inrush, 1A continuous)	
		For connection with R6T		Quantity: 2	
		Remark		Minimum 0.75 mm <sup>2</sup>	
		For connection with A3P		Quantity: 2	
		Remark		Depends on thermostat type, cf. installation manual Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>	
		For connection with M2S		Quantity: 2	
		Remark		Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>	
		For connection with optional FWXV* (demand input and output)		Quantity: 4	
		Remark		100 mA, minimum 0.75 mm <sup>2</sup>	

(1) Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |

(2) Minimum required volume, excluding the volume in the unit |

(3) Refer to operation range of the unit. |

(4) Depends on operation mode, refer to installation manual. |

(5) Based on  $\Delta T$  of 45 K |

(6) Measured with a pressure drop of 10 kPa in the heating system at an operating condition of leaving water 47-55°C in a room with an ambient of 20°C. DB/WB 7°C/6°. |

(7) Value measured in an anechoic room at 1m distance from the unit. It is a relative value, depending on the distance and acoustic environment. The sound pressure level mentioned is measured with a pressure drop of 10 kPa in the heating system at an operatin |

(8) Above mentioned power supply of the hydrobox is for the backup heater only. The switch box and the pump of the hydrobox are supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |

(9) Refer to wiring diagram and installation manual for correct recommended fuse depending on power supply and grid connection

Technical specifications				EPVX10S18A9W	EPVX10S23A9W
Heater capacity		Step 3	kW	9	
Casing		Colour		White	
		Material		Precoated galvanized steel + plastic	
Dimensions		Unit		1,650	1,850
		Height		595	
		Width		625	
		Depth		625	
		Packed unit		1,820	2,020
		Height		696	
		Width		680	
		Depth		680	
Weight		Unit		94	111
		Packed unit		109	126
Packing		Weight		14	
Pump		Type		Grundfos UPM4XL LIN 25-90	
		Nr of speeds		LIN	
		Power input		90	

# 2 Specifications

## 2 - 1 Specifications

Technical specifications				EPVX10S18A9W	EPVX10S23A9W	
Water side Heat exchanger	Water flow rate	Min.	l/min	22 (1)		
		Max.	l/min	29		
Expansion vessel	Volume		l	8		
	Max. water pressure		bar	3		
	Pre pressure		bar	1		
Water filter	Diameter perforations		mm	0.8		
	Material			Resin / Stainless steel		
Water filter Main Zone	Diameter perforations		mm	0.8		
	Material			Plastic / Copper - brass - stainless steel		
Tank	Name			Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	
	Water volume		l	180	230	
	Material			Stainless steel (EN 1.4521)		
	Maximum water temperature		°C	0		
	Maximum water pressure		bar	10		
	Insulation	Material			Polyurethane foam	
		Heat loss		kWh/24h	1.2 (5)	1.4 (5)
	Standing heat loss	S		W	50	58
		V		l	180	220
	Storage volume					
Corrosion protection				Pickling		
Energy efficiency class				B		
General	Supplier/ Manufacturer details	Name or trademark		Daikin Europe N.V.		
General	Supplier/ Manufacturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium		
3-way valve	Coefficient of flow (kV)	Space heating	m <sup>3</sup> /h	10		
		Domestic hot water tank	m <sup>3</sup> /h	10		
Water circuit	inch		in	G 1" (female)		
	Piping material			Stainless steel		
	inch		in	1"		
	inch		in	1"		
	Safety valve		bar	3		
	Manometer			Digital		
	Drain valve / fill valve			No		
	Shut off valve			Yes		
	flowswitch			No		
	Air purge valve			Yes		
	Pressure	Heating	Max.	bar	3	
	Minimum water volume in the system for cooling			l	25 (2)	
	Minimum water volume in the system for heating			l	0 (2)	
Water circuit - Domestic hot water side	Piping material			Stainless steel		
	Piping connections	Cold water in / Hot water out	inch	G 3/4" FEMALE		
Sound power level	Nom.			45 (6)		
Sound pressure level	Nom.			31 (7)		
Operation range	Heating	Ambient	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
		Water side	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
	Indoor installation	Ambient	Min.	°CDB	5	
			Max.	°CDB	35 (4)	
		Cooling	Min.	°CDB	0 (3)	
			Max.	°CDB	0 (3)	
	Domestic hot water	Water side	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
		Water side	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
Installation place				Indoor		
Safety devices	Item	01		Thermal cut out		
Electrical specifications				EPVX10S18A9W	EPVX10S23A9W	
Power supply	Name			See note 8		
	Phase			3~		
	Frequency		Hz	50		
	Voltage			230/400		
	Voltage range	Min.		%	10	
		Max.		%	10	
IP class	IP			IP X0B		

# 2 Specifications

## 2 - 1 Specifications

2

Electrical specifications				EPVX10S18A9W	EPVX10S23A9W
Electric heater	Power supply	Name		9W	
		Phase		3~	
		Frequency	Hz	50	
		Voltage	V	400	
	Current	Minimum Ssc value		Equipment complying with EN/IEC 61000-3-12	
	Recommended fuses	A		0 (9)	
	Voltage range	Min.	%	10	
Max.		%	10		
Wiring connections	Communication cable	Quantity		3+GRD	
		Remark		1.5 mm <sup>2</sup>	
	Electric meter	Quantity		2	
		Remark		Minimum 0.75 mm <sup>2</sup> (16VDC pulse detection) ..	
	Preferential kWh rate power supply	Quantity		Power: 2	
		Remark		Power 6.3A (Select diameter and type according to national and local regulations)	
	Domestic hot water pump	Quantity		2	
		Remark		Minimum 0.75 mm <sup>2</sup> (2A inrush, 1A continuous)	
	For connection with R6T	Quantity		2	
		Remark		Minimum 0.75 mm <sup>2</sup>	
	For connection with A3P	Quantity		Depends on thermostat type, cf. installation manual	
		Remark		Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>	
	For connection with M2S	Quantity		2	
Remark			Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>		
For connection with optional FWXV* (demand input and output)	Quantity		4		
	Remark		100 mA, minimum 0.75 mm <sup>2</sup>		

(1)Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |

(2)Minimum required volume, excluding the volume in the unit |

(3)Refer to operation range of the unit. |

(4)Depends on operation mode, refer to installation manual. |

(5)Based on dT of 45 K |

(6)Measured with a pressure drop of 10 kPa in the heating system at an operating condition of leaving water 47-55°C in a room with an ambient of 20°C. DB/WB 7°C/6°. |

(7)Value measured in an anechoic room at 1m distance from the unit. It is a relative value, depending on the distance and acoustic environment. The sound pressure level mentioned is measured with a pressure drop of 10 kPa in the heating system at an operatin |

(8)Above mentioned power supply of the hydrobox is for the backup heater only. The switch box and the pump of the hydrobox are supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |

(9)Refer to wiring diagram and installation manual for correct recommended fuse depending on power supply and grid connection

Technical specifications				EPVX14S18A4V	EPVX14S23A4V
Heater capacity	Step 3		kW	4.5	
Casing	Colour			White	
	Material			Precoated galvanized steel + plastic	
Dimensions	Unit	Height	mm	1,650	1,850
		Width	mm		595
		Depth	mm		625
	Packed unit	Height	mm	1,820	2,020
		Width	mm		696
		Depth	mm		680
Weight	Unit		kg	94	111
	Packed unit		kg	109	126
Packing	Weight		kg	14	
Pump	Type			Grundfos UPM10XL LIN 25-125	
	Nr of speeds			LIN	
	Power input		W	180	
Water side Heat exchanger	Water flow rate	Min.	l/min	24 (1)	
		Max.	l/min	40	
Expansion vessel	Volume		l	8	
	Max. water pressure		bar	3	
	Pre pressure		bar	1	
Water filter	Diameter perforations		mm	0.8	
	Material			Resin / Stainless steel	
Water filter Main Zone	Diameter perforations		mm	0.8	
	Material			Plastic / Copper - brass - stainless steel	

# 2 Specifications

## 2 - 1 Specifications

Technical specifications				EPVX14S18A4V	EPVX14S23A4V	
Tank	Name		Stainless steel domestic hot water tank 180 l		Stainless steel domestic hot water tank 230 L	
	Water volume	l	180		230	
	Material		Stainless steel (EN 1.4521)			
	Maximum water temperature	°C	0			
	Maximum water pressure	bar	10			
	Insulation	Material		Polyurethane foam		
		Heat loss	kWh/24h	1.2 (5)	1.4 (5)	
	Standing heat loss	S	W	50	58	
	Storage volume	V	l	180	220	
	Corrosion protection		Pickling			
Energy efficiency class		B				
General	Supplier/ Manufacturer details	Name or trademark		Daikin Europe N.V.		
General	Supplier/ Manufacturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium		
3-way valve	Coefficient of flow (kV)	Space heating	m <sup>3</sup> /h	10		
		Domestic hot water tank	m <sup>3</sup> /h	10		
Water circuit	inch		in			
	Piping material		Stainless steel			
	inch		in			
	inch		in			
	Safety valve		bar			
	Manometer		Digital			
	Drain valve / fill valve		No			
	Shut off valve		Yes			
	flowswitch		No			
	Air purge valve		Yes			
Water circuit - Domestic hot water side	Piping connections	Heating	Max. bar	3		
		Minimum water volume in the system for cooling	l	30 (2)		
	Minimum water volume in the system for heating	l	20 (2)			
	Piping material	Stainless steel				
Sound power level	Nom.		45 (6)			
	Nom.		31 (7)			
Operation range	Heating	Ambient	Min.	°C		
			Max.	°C		
		Water side	Min.	°C		
			Max.	°C		
	Indoor installation	Ambient	Min.	°CDB		
			Max.	°CDB		
	Cooling	Ambient	Min.	°CDB		
			Max.	°CDB		
		Water side	Min.	°C		
			Max.	°C		
Domestic hot water	Water side	Min.	°C			
		Max.	°C			
Installation place	Indoor					
Safety devices	Item	01	Thermal cut out			

Electrical specifications				EPVX14S18A4V	EPVX14S23A4V	
Power supply	Name		See note 8			
	Phase		1~/3~			
	Frequency		Hz			
	Voltage		V			
	Voltage range	Min.	%			
		Max.	%			
IP class	IP		IP X0B			
Electric heater	Power supply	Name		4V		
		Phase		1~/3~		
		Frequency		Hz		
		Voltage		V		
	Current	Minimum Ssc value		Equipment complying with EN/IEC 61000-3-12		
	Recommended fuses	A		0 (9)		
Voltage range	Min.	%				
	Max.	%				

# 2 Specifications

## 2 - 1 Specifications

2

Electrical specifications			EPVX14S18A4V	EPVX14S23A4V
Wiring connections	Communication cable	Quantity	3+GRD	
		Remark	1.5 mm <sup>2</sup>	
	Electric meter	Quantity	2	
		Remark	Minimum 0.75 mm <sup>2</sup> (16VDC pulse detection) ..	Minimum 0.75 mm <sup>2</sup> (5VDC pulse detection)
	Preferential kWh rate	Quantity	Power: 2	
	power supply	Remark	Power 6.3A (Select diameter and type according to national and local regulations)	
	Domestic hot water pump	Quantity	2	
		Remark	Minimum 0.75 mm <sup>2</sup> (2A inrush, 1A continuous)	
	For connection with R6T	Quantity	2	
		Remark	Minimum 0.75 mm <sup>2</sup>	
	For connection with A3P	Quantity	Depends on thermostat type, cf. installation manual	
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>	
	For connection with M2S	Quantity	2	
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>	
	For connection with optional FWXV* (demand input and output)	Quantity	4	
	Remark	100 mA, minimum 0.75 mm <sup>2</sup>		

(1)Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |

(2)Minimum required volume, excluding the volume in the unit |

(3)Refer to operation range of the unit. |

(4)Depends on operation mode, refer to installation manual. |

(5)Based on dT of 45 K |

(6)Measured with a pressure drop of 10 kPa in the heating system at an operating condition of leaving water 47-55°C in a room with an ambient of 20°C. DB/WB 7°C/6°. |

(7)Value measured in an anechoic room at 1m distance from the unit. It is a relative value, depending on the distance and acoustic environment. The sound pressure level mentioned is measured with a pressure drop of 10 kPa in the heating system at an operatin |

(8)Above mentioned power supply of the hydrobox is for the backup heater only. The switch box and the pump of the hydrobox are supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |

(9)Refer to wiring diagram and installation manual for correct recommended fuse depending on power supply and grid connection

Technical specifications				EPVX14S18A9W	EPVX14S23A9W
Heater capacity	Step 3		kW	9	
Casing	Colour			White	
	Material			Precoated galvanized steel + plastic	
Dimensions	Unit	Height	mm	1,650	1,850
		Width	mm	595	
		Depth	mm	625	
	Packed unit	Height	mm	1,820	2,020
		Width	mm	696	
		Depth	mm	680	
Weight	Unit		kg	94	111
	Packed unit		kg	109	126
Packing	Weight		kg	14	
Pump	Type			Grundfos UPM10XL LIN 25-125	
	Nr of speeds			LIN	
	Power input		W	180	
Water side Heat exchanger	Water flow rate	Min.	l/min	24 (1)	
		Max.	l/min	40	
Expansion vessel	Volume		l	8	
	Max. water pressure		bar	3	
	Pre pressure		bar	1	
Water filter	Diameter perforations		mm	0.8	
	Material			Resin / Stainless steel	
Water filter Main Zone	Diameter perforations		mm	0.8	
	Material			Plastic / Copper - brass - stainless steel	

# 2 Specifications

## 2 - 1 Specifications

Technical specifications				EPVX14S18A9W	EPVX14S23A9W	
Tank	Name			Stainless steel domestic hot water tank 180 l	Stainless steel domestic hot water tank 230 L	
	Water volume	l		180	230	
	Material			Stainless steel (EN 1.4521)		
	Maximum water temperature	°C		0		
	Maximum water pressure	bar		10		
	Insulation	Material			Polyurethane foam	
		Heat loss	kWh/24h		1.2 (5)	1.4 (5)
	Standing heat loss	S	W		50	58
		Storage volume	l		180	220
	Corrosion protection			Pickling		
	Energy efficiency class			B		
	General	Supplier/ Manufacturer details	Name or trademark		Daikin Europe N.V.	
General	Supplier/ Manufacturer details	Name and address		Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium		
3-way valve	Coefficient of flow (kV)	Space heating	m <sup>3</sup> /h	10		
		Domestic hot water tank	m <sup>3</sup> /h	10		
Water circuit	inch		in	G 1" (female)		
	Piping material			Stainless steel		
	inch		in	1"		
	inch		in	1"		
	Safety valve		bar	3		
	Manometer			Digital		
	Drain valve / fill valve			No		
	Shut off valve			Yes		
	flowswitch			No		
	Air purge valve			Yes		
	Pressure	Heating	Max.	bar	3	
	Minimum water volume in the system for cooling		l		30 (2)	
Minimum water volume in the system for heating		l		20 (2)		
Water circuit - Domestic hot water side	Piping material			Stainless steel		
	Piping connections	Cold water in / Hot water out	inch	G 3/4" FEMALE		
Sound power level	Nom.		dB(A)	45 (6)		
Sound pressure level	Nom.		dB(A)	31 (7)		
Operation range	Heating	Ambient	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
		Water side	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
	Indoor installation	Ambient	Min.	°CDB	5	
			Max.	°CDB	35 (4)	
	Cooling	Ambient	Min.	°CDB	0 (3)	
			Max.	°CDB	0 (3)	
		Water side	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
	Domestic hot water	Water side	Min.	°C	0 (3)	
			Max.	°C	0 (3)	
Installation place				Indoor		
Safety devices	Item	01	Thermal cut out			

Electrical specifications				EPVX14S18A9W	EPVX14S23A9W	
Power supply	Name			See note 8		
	Phase			3~		
	Frequency		Hz	50		
	Voltage		V	230/400		
	Voltage range	Min.	%	10		
		Max.	%	10		
IP class	IP		IP X0B			
Electric heater	Power supply	Name		9W		
		Phase		3~		
		Frequency		Hz	50	
		Voltage		V	400	
	Current	Minimum Ssc value		Equipment complying with EN/IEC 61000-3-12		
	Recommended fuses		A	0 (9)		
	Voltage range	Min.	%	10		
Max.		%	10			

# 2 Specifications

## 2 - 1 Specifications

**2**

Electrical specifications			EPVX14S18A9W	EPVX14S23A9W	
Wiring connections	Communication cable	Quantity		3+GRD	
		Remark		1.5 mm <sup>2</sup>	
	Electric meter	Quantity		2	
		Remark		Minimum 0.75 mm <sup>2</sup> (5VDC pulse detection)	
	Preferential kWh rate	Quantity			Power: 2
		Remark		Power 6.3A (Select diameter and type according to national and local regulations)	
	Domestic hot water pump	Quantity		2	
		Remark		Minimum 0.75 mm <sup>2</sup> (2A inrush, 1A continuous)	
	For connection with R6T	Quantity		2	
		Remark		Minimum 0.75 mm <sup>2</sup>	
	For connection with A3P	Quantity			Depends on thermostat type, cf. installation manual
		Remark		Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>	
	For connection with M2S	Quantity		2	
		Remark		Voltage: 230V / Max. current: 100mA / Min. 0.75mm <sup>2</sup>	
For connection with optional FWXV* (demand input and output)	Quantity		4		
	Remark		100 mA, minimum 0.75 mm <sup>2</sup>		

(1) Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |

(2) Minimum required volume, excluding the volume in the unit |

(3) Refer to operation range of the unit. |

(4) Depends on operation mode, refer to installation manual. |

(5) Based on dT of 45 K |

(6) Measured with a pressure drop of 10 kPa in the heating system at an operating condition of leaving water 47-55°C in a room with an ambient of 20°C. DB/WB 7°C/6°. |

(7) Value measured in an anechoic room at 1m distance from the unit. It is a relative value, depending on the distance and acoustic environment. The sound pressure level mentioned is measured with a pressure drop of 10 kPa in the heating system at an operatin |

(8) Above mentioned power supply of the hydrobox is for the backup heater only. The switch box and the pump of the hydrobox are supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |

(9) Refer to wiring diagram and installation manual for correct recommended fuse depending on power supply and grid connection

# 3 Electrical data

## 3 - 1 Electrical Data

### EPVX10A4V / EPVX10A9W / EPVX10UA4V / EPVX14A4V / EPVX14A9W / EPVX14UA4V

Electrical specifications of the backup heaters and booster heaters									
Backup heater	Type	9W				4V			
	Capacity setting	[kW]	1 - 9	1 - 6		1 - 4.5			
	Capacity stage · ·		9	6		9			
	Capacity stage ·1·	kW	1	1		0.5			
	Capacity stage ·2·	kW	2	2		1			
	Capacity stage ·3·	kW	3	3		1.5			
	Capacity stage ·4·	kW	4	4		2			
	Capacity stage ·5·	kW	5	5		2.5			
	Capacity stage ·6·	kW	6	6		3			
	Capacity stage ·7·	kW	7	-		3.5			
Capacity stage ·8·	kW	8	-		4				
Capacity stage ·9·	kW	9	-		4.5				
Minimum time delay between stages	Max net change ≤ -1· kW	10s							
	Max net change ≤ -2· kW	40s							
	Max net change > -2· kW	150s							
Power supply (1)	Voltage	390 - 410V	220 - 240V		390 - 410V	220 - 240 V			
	Capacity	9kW	6kW		4.5kW				
	Rated current	13A	13A	26.1A <sup>(2)</sup>	6.5A	13A	19.6A <sup>(2)</sup>	17A <sup>(2)</sup>	19.6A <sup>(2)</sup>
	Phase	3N~	1N~		3N~	1N~		3~	2~
	Frequency	50Hz							
Type of wires	Must comply with national wiring regulation								
		Min. ·2.5· mm <sup>2</sup>	Min. ·6· mm <sup>2</sup>	Min. ·2.5· mm <sup>2</sup>		Min. ·4· mm <sup>2</sup>	Min. ·2.5· mm <sup>2</sup>	Min. ·4· mm <sup>2</sup>	
		·5·-wire cable	·3·-wire cable	·5·-wire cable		·3·-wire cable	·4·-wire cable	·3·-wire cable	
Recommended overcurrent protection	4-pole ·16· A		2-pole ·32· A	4-pole ·10· A	4-pole ·16· A	2-pole ·25· A	4-pole ·20· A	2-pole ·25· A	
Earth leakage circuit breaker	Must comply with national wiring regulation								
Notes	(1)	The above-mentioned power supply of the hydrobox is for the backup heater only. The optional domestic hot water tank has a separate power supply.							
	(2)	The equipment complies with EN/IEC 61000-3-12.							
	EN/IEC 61000-3-12	European/International Technical Standard setting the limits for harmonic currents produced by equipment connected to public low-voltage systems with input current > 16 A and ≤ 75 A per phase.							

4D154678A

### EPVX10A4V EPVX10A9W EPVX10UA4V EPVX14A4V EPVX14A9W EPVX14UA4V

#### \* Electrical meter specification

- Pulse meter type/voltage-free contact for 5 V DC detection by PCB.
  - Possible number of pulses
    - 0.1· pulse/kWh
    - 1· pulse/kWh
    - 10· pulse/kWh
    - 100· pulse/kWh
    - 1000· pulse/kWh
  - Pulse duration
    - minimum On time: ·40ms·
    - Minimum OFF time: ·100ms·
  - Measurement type (depending on installation)
    - Single-phase AC meter
    - Three-phase AC meter
- Balanced loads
- Three-phase AC meter
- Unbalanced loads

#### \* Electrical meter installation guideline

- It is the responsibility of the installer to cover the complete power consumption with electrical meters (combination of estimation and metering is not allowed).
- Required number of electrical meters

Outdoor unit type	EPSK(06/08/10)A*V3				EPSK(08/10)A*W1				EPSK(12/14)A*W1							
Indoor unit type	EPVX10S(18/23)A*								EPVX14S(18/23)A*							
Backup heater type	4V				9W				4V				9W			
Backup heater power supply	1~ 230V	3~ 400V	3~ 230V	2~ 230V	1~ 230V	3~ 400V	1~ 230V	3~ 400V	3~ 230V	2~ 230V	1~ 230V	3~ 400V	3~ 230V	2~ 230V	1~ 230V	3~ 400V
Backup heater configuration	Step ·0.5kW·				Step ·1kW·				Step ·0.5kW·				Step ·1kW·			
<b>Indoor unit supplied separately or from outdoor unit (normal kWh rate power supply)</b>																
Electrical meter type	1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced	
	1	-	-	-	1	-	-	-	1	-	-	-	1	-	-	-
	-	1	1	1	-	1	1	1	-	1	1	1	-	1	1	1
<b>Indoor unit supplied separately (preferential kWh rate power supply)</b>																
Electrical meter type	1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced	
	2	1	-	-	2	1	1	-	1	-	-	-	2	1	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	-	1	2	2	-	1	1	2	2	1	2	2	1	2	2	1
<b>Indoor unit supplied from outdoor unit (preferential kWh rate power supply) <sup>(1)</sup></b>																
Electrical meter type	1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced		1~	3~ balanced	3~ unbalanced	
	1	-	-	-	1	-	-	-	1	-	-	-	1	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	-	1	1	1	-	1	1	1	1	1	1	1	1	1	1	1

(1) only if the electricity company demands to consume a limited amount of electricity and does not shut down the power supply

4D154680

# 4 Combination table

## 4 - 1 Combination Table

4

### EPVX10A4V / EPVX10A9W / EPVX10UA4V

### EPVX14A4V / EPVX14A9W / EPVX14UA4V

Factory-mounted equipment for -EPVX(10/14)S\*AJ\*.

Description	EPVX(10/14)S*AJ*			
	18 - 4V	18 - 9W	23 - 4V	23 - 9W
Reversible model - EPVX	0	-	0	-
Backup heater - 4.5kW 1N-230V	0	-	0	-
Backup heater - 4.5kW 3N-400V	0	-	0	-
Backup heater - 6.9kW 1N-230V	-	0	-	0
Backup heater - 6.9kW 3N-400V	-	0	-	0
Domestic hot water tank - 180L	0	0	-	-
Domestic hot water tank - 230L	-	-	0	0

Outdoor combination table for -EPVX(10/14)S\*AJ\*.

		EPSK06ARV3	EPSK(08/10)AR(V3/W1)	EPSK(12/14)ARW1
EPVX10S(18/23)AJ(4V/9W)	Reversible indoor unit	0	0	-
EPVX14S(18/23)AJ(4V/9W)	Reversible indoor unit	-	-	0

Kit availability

Reference	Description	EPVX(10/14)S*AJ*			
		18 - 4V	18 - 9W	23 - 4V	23 - 9W
EPVX	Reversible indoor unit				
BRC1HHDA*	HCI (Human Comfort Interface)	0	0	0	0
EKPCAB4	PC cable	*(1)	0	0	0
KRC501-1	Remote indoor sensor	*(2)	0	0	0
EKRSCA1	Remote sensor for outdoor	*(2)	0	0	0
FWXY10-15-20ABTV3(R)	Heat pump convector	*(3)	0	0	0
FWXY10-15-20ABTV3*	Heat pump convector	*(3)	0	0	0
FWXY10-15-20AATV3(R)	Heat pump convector	*(3)	0	0	0
EKRTWA	Wired room thermostat	0	0	0	0
EKRTRB	Wireless room thermostat	0	0	0	0
EKRTEIS	External sensor room thermostat	*(4)	0	0	0
EKWUFHTA1V3	Multi-zoning base unit 230 V	*(5)	0	0	0
EKWCTRD1V3	Digital thermostat 230 V	*(5)	0	0	0
EKWCTRA1V3	Analogue thermostat 230 V	*(5)	0	0	0
EKWCVAT1V3	Actuator 230 V	*(5)	0	0	0
EKRVRTR2BA	Radiator Thermostat	*(6)	0	0	0
EKRUFHT61V3	Floor Heating Controller	*(6)	0	0	0
EKRACPUR1PA	Access Point	*(6)	0	0	0
EKRMBEV1V3	Multi IO Box	*(6)	0	0	0
EKRSDI1V3	Basic IO Box	*(6)	0	0	0
EKRCTRD12BA	Room Thermostat --- 1-	*(6)	0	0	0
EKRCTRD13BA	Room Thermostat --- 2-	*(6)	0	0	0
EKRSEND1BA	Room Sensor	*(6)	0	0	0
EKRELSG	Relay for Smart Grid	0	0	0	0
AFVALVE125	Freeze protection valve	0	0	0	0
ESAE04*	Daikin Residential Controller	0	0	0	0
EKBUKRW1	BUH Rewiring kit	0	0	0	0
EKBUKRW3	BUH Rewiring kit	0	0	0	0

**4D154681**

### EPVX10A4V / EPVX10A9W / EPVX10UA4V

### EPVX14A4V / EPVX14A9W / EPVX14UA4V

Reference	Description	EPVX(10/14)S*AJ*
EKMIKPOAF	Mixing kit - PCB only	0
EKMIKPHAF	Mixing kit - PCB with hydraulics	0
EKMIKHMAF	Hydraulics - mixed pump group	*(7)
EKMIKHUAF	Hydraulics - unmixed pump group	*(7)
EKMIKBVAF	Balancing vessel	0
EKMIKDIAF	Distributor for balancing vessel	*(8)

Kit availability for outdoor units

Reference	Description	EPSK06A*V3	EPSK(08/10)A*V3	EPSK(08/10)A*W1	EPSK(12/14)A*W1
EKMST4	Mounting stand	0	0	0	0

Notes

- (1) Data cable for connection with PC.
- (2) Only 1 remote sensor can be connected: indoor OR outdoor sensor.
- (3) The valve kit is mandatory if a heat pump convector is installed on a reversible model (not mandatory for heating only models).
- (4) -EKRTETS- can only be used in combination with -EKRTRB-.
- (5) Multi-zoning wired controls
- (6) Daikin Home Controls (wireless)
- (7) Only possible in combination with -EKMIKPOAF-.
- (8) Only possible in combination with -EKMIKBVAF- and -EKMIKPHAF- or -EKMIKHUAF-.

Remark



Other combinations than mentioned in this combination table are prohibited.

**4D154681**




# 5 Dimensional drawings

## 5 - 1 Dimensional Drawings


EPVX10A4V  
 EPVX10A9W  
 EPVX10UA4V  
 EPVX14A4V  
 EPVX14A9W  
 EPVX14UA4V



- ① Water OUT to outdoor unit
- ② Water IN from outdoor unit
- ③ Domestic hot water: hot water out ·G3/4"· (female)
- ④ Domestic hot water: cold water in ·G3/4"·
- ⑤ Water OUT connection ·G1"· (female)
- ⑥ Water IN connection ·G1"· (female)
- ⑦ User interface
- ⑧ Drain outlet (unit + safety valve)
- ⑨ Levelling feet
- ⑩ High voltage wiring intake ·Ø24·
- ⑪ Low voltage wiring intake ·Ø26·
- ⑫ Recirculation connection ·G3/4"· (female)
- ⑬ Flow sensor
- ⑭ 3-way valve
- ⑮ Expansion vessel
- ⑯ Magnetic filter / dirt separator
- ⑰ Backup heater
- ⑱ Gas separator
- ⑲ Shut-off valve normally closed ..
- ⑳ Pump
- ㉑ Shut-off valve
- ㉒ Gas sensor
- ㉓ Thermal cutout

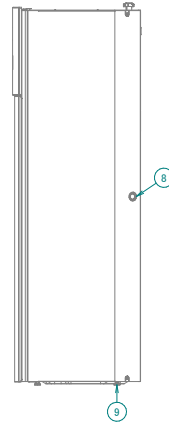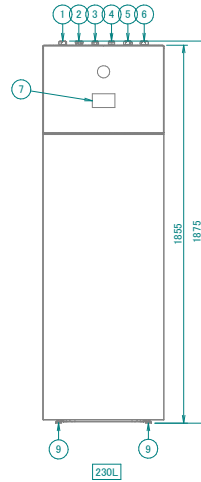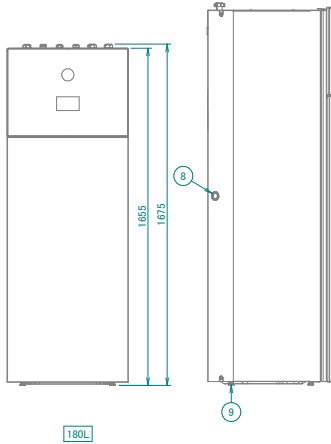

Screws used in this unit:




3D154674

# 6 Centre of gravity

## 6 - 1 Centre of Gravity

6

EPVX10A4V  
 EPVX10A9W  
 EPVX10UA4V  
 EPVX14A4V  
 EPVX14A9W  
 EPVX14UA4V

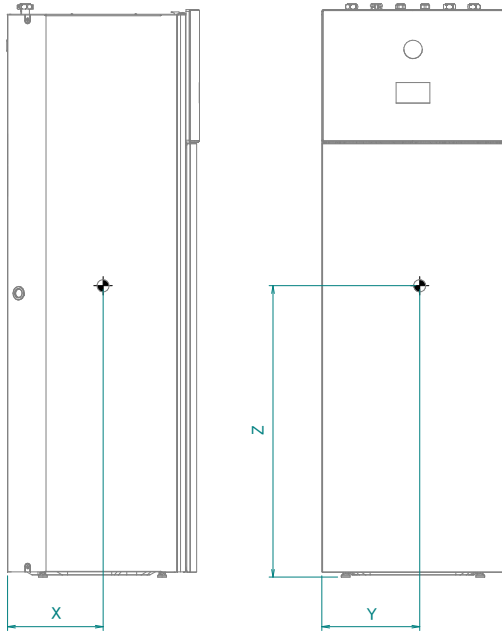

MODEL	X	Y	Z
EPVX10S18*	307	321	853
EPVX10S23*	312	320	953
EPVX10SU18*	307	321	853
EPVX10SU23*	312	320	953
EPVX14S18*	307	321	853
EPVX14S23*	312	320	953
EPVX14SU18*	307	321	853
EPVX14SU23*	312	320	953

3D154675

# 7 Piping diagrams

## 7 - 1 Piping Diagrams


EPVX10A4V  
 EPVX10A9W  
 EPVX10UA4V  
 EPVX14A4V  
 EPVX14A9W  
 EPVX14UA4V

- ① Space heating - water OUT
- ② Space heating - water IN
- ③ Domestic hot water: hot water out -3/4"
- ④ Domestic hot water: cold water in -3/4"
- ⑤ Recirculation connection -3/4" (female)
- ⑥ Expansion vessel
- ⑦ Magnetic filter / dirt separator
- ⑧ Safety valve
- ⑨ Air purge
- ⑩ Gas separator
- ⑪ Pump
- ⑫ Sensor
- ⑬ Space heating water pressure sensor
- ⑭ Flow sensor
- ⑮ Backup heater
- ⑯ 3-way valve (space heating/domestic hot water)

- ⑰ R1T - Inlet water thermistor
- ⑱ R2T - Outlet water backup heater thermistor
- ⑲ R5T - Tank thermistor
- ⑳ R8T - Tank thermistor

Field piping connections

- ① Water in connection -1"1/4-
- ② Water out connection -1"1/4-
- ③ Screw connection -1"
- ④ R11T - Tank thermistor
- ⑤ Shut-off valve normally closed ...
- ⑥ Hose for air purge
- ⑦ Drain hose for water
- ⑧ Quick connection
- ⑨ Shut-off valve -1"-1"1/4- (male-female)

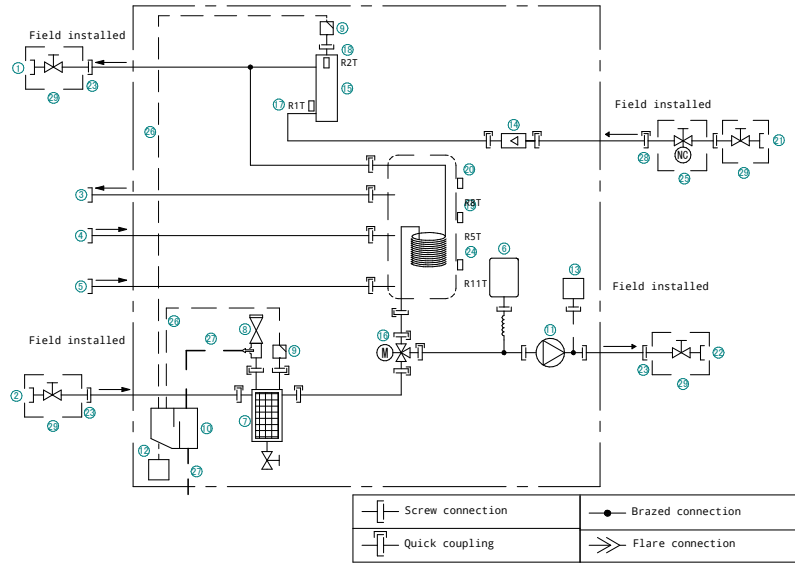

3D151704A

# 8 Wiring diagrams

## 8 - 1 Notes & Legend

8

### EPVX10A4V / EPVX10A9W / EPVX10UA4V EPVX14A4V / EPVX14A9W / EPVX14UA4V

#### NOTES to go through before starting the unit

- X2M : Main Terminal Outdoor Unit
- X40M : Main Terminal Indoor Unit
- X41M : Main Terminal Back-Up Heater
- X42M : Field Wiring for High Voltage
- X44M + X45M : Field Wiring for SELV

- : Earth wiring
- - - - - : Field supply
- ① : Several wiring possibilities
- [ ] : Option
- [ ] : Wiring depending on model
- [ ] : Not mounted in switch box
- [ ] : PCB

Note 1 : Connection point of the power supply for the BUH should be foreseen outside the unit.


- Backup heater power supply
- 4,5kW (1/N~, 230V)
  - 4,5kW (3/N~, 400V)
  - 4,5kW (3~, 230V)
  - 4,5kW (2~, 230V)
  - 6kW (1/N~, 230V)
  - 9kW (3/N~, 400V)

- User installed options:
- Remote User Interface
  - Ext. indoor thermistor
  - Ext. outdoor thermistor
  - Safety thermostat
  - Smartgrid kit
  - W-LAN Cartridge
  - Bizona Mixing Kit

- Main LWT:
- On/OFF thermostat (wired)
  - On/OFF thermostat (wireless)
  - Ext. thermistor
  - Heat pump convactor

- Add LWT:
- On/OFF thermostat (wired)
  - On/OFF thermostat (wireless)
  - Ext. thermistor
  - Heat pump convactor

#### POSITION IN SWITCH BOX

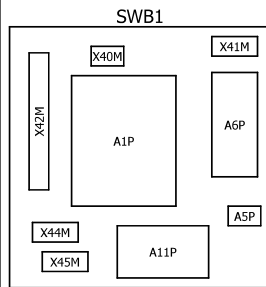

#### LEGEND



Translation can be found in the installation manual.

\* : Optional  
# : Field supply

Part n°	Description
A1P	Hydro PCB
A2P	* On/OFF thermostat (PC=power circuit)
A3P	* Heat Pump Convactor
A5P	Power Supply PCB
A6P	Multi-Step Back-Up Heater PCB
A9P	Daikin Eye (Status indicator)
A11P	Interface PCB
A12P	Display PCB
A14P	* Remote User Interface
A15P	* Receiver PCB (wireless On/OFF thermostat)
A30P	* Bizona Mixing Kit PCB
B2L	Flow sensor
B4L	Gas Sensor
B1PW	Water pressure sensor
CN* (A5P)	Connector
E1H	Backup heater element
E2H	Backup heater element
E3H	Backup heater element
E4H	Backup heater element
E5H	Backup heater element
E*P (A9P)	Indication LED
F1B	# Overcurrent fuse backup heater
F2B	# Overcurrent fuse Main
F1T	Thermal Fuse backup heater
FU1 (A1P)	Fuse T 5 A 250 V for PCB
K1A, K2A	* High voltage smartgrid relay
K*R (A*P)	Relay on PCB
K80* (A6P)	Relay on PCB
M1P	Unit Pump
M1S	Stepper Motor Valve 1 Diverter 3-Way Valve


Part n°	Description
M2P	# Domestic hot water pump
M2S	# 2-Way valve for cooling mode
M4S	Shut off valve - Inlet Leak Stop
P* (A14P)	* Terminal
P1M	Display
PC (A15P)	* Power circuit
PHC-T (A6P)	Thermal cutout detection
Q*DI	# Earth Leakage Circuit Breaker
Q1L	Thermal protector backup heater
Q4L	# Safety thermostat
R1H (A2P)	* Humidity sensor
R1T (A1P)	Outlet water heat exchanger thermistor
R1T (A2P)	* Ambient sensor On/OFF thermostat
R1T (A14P)	* Ambient sensor user interface
R2T (A1P)	Outlet backup heater thermistor
R2T (A2P)	* External sensor (floor or ambient)
R5T, R6T, R11T	Domestic hot water thermistor
R6T	* External in- or outdoor ambient thermistor
S1S	# Preferential kWh rate PS contact
S2S	# Electrical meter pulse input 1
S3S	# Electrical meter pulse input 2
S4S	# Smartgrid feed-in
S10S-S11S	# Low voltage smartgrid contact
ST6 (A30P)	Connector
TS1	Touch Sensor
X*A, X*Y, X*Y*	Connector
X*M	Terminal strip

4D146607B

# 8 Wiring diagrams


## 8 - 2 Wiring Diagrams - Hydro Module

EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

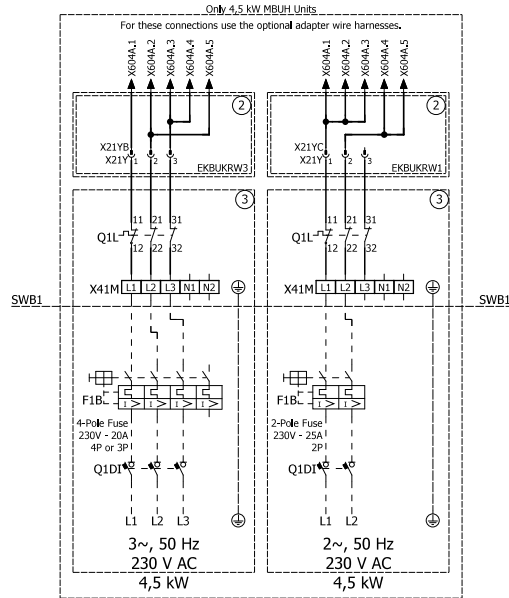

4D146607A

EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

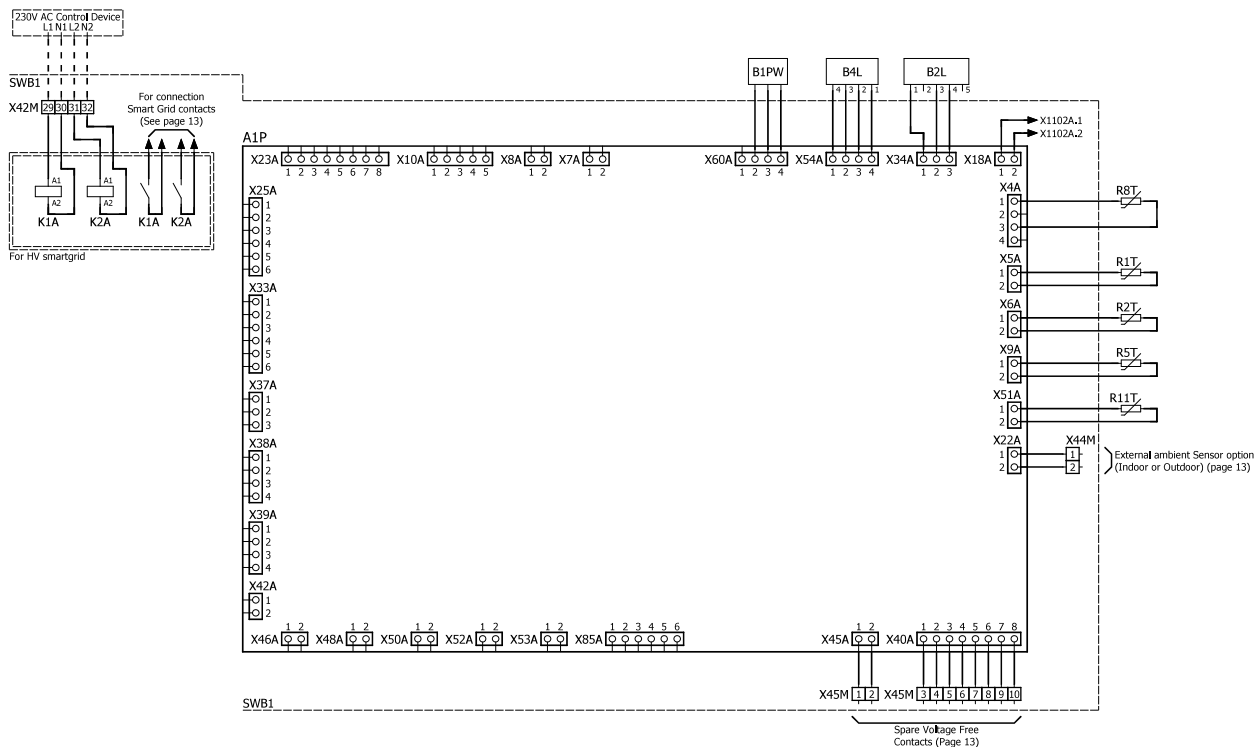


4D146607A

# 8 Wiring diagrams

## 8 - 2 Wiring Diagrams - Hydro Module


8

EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

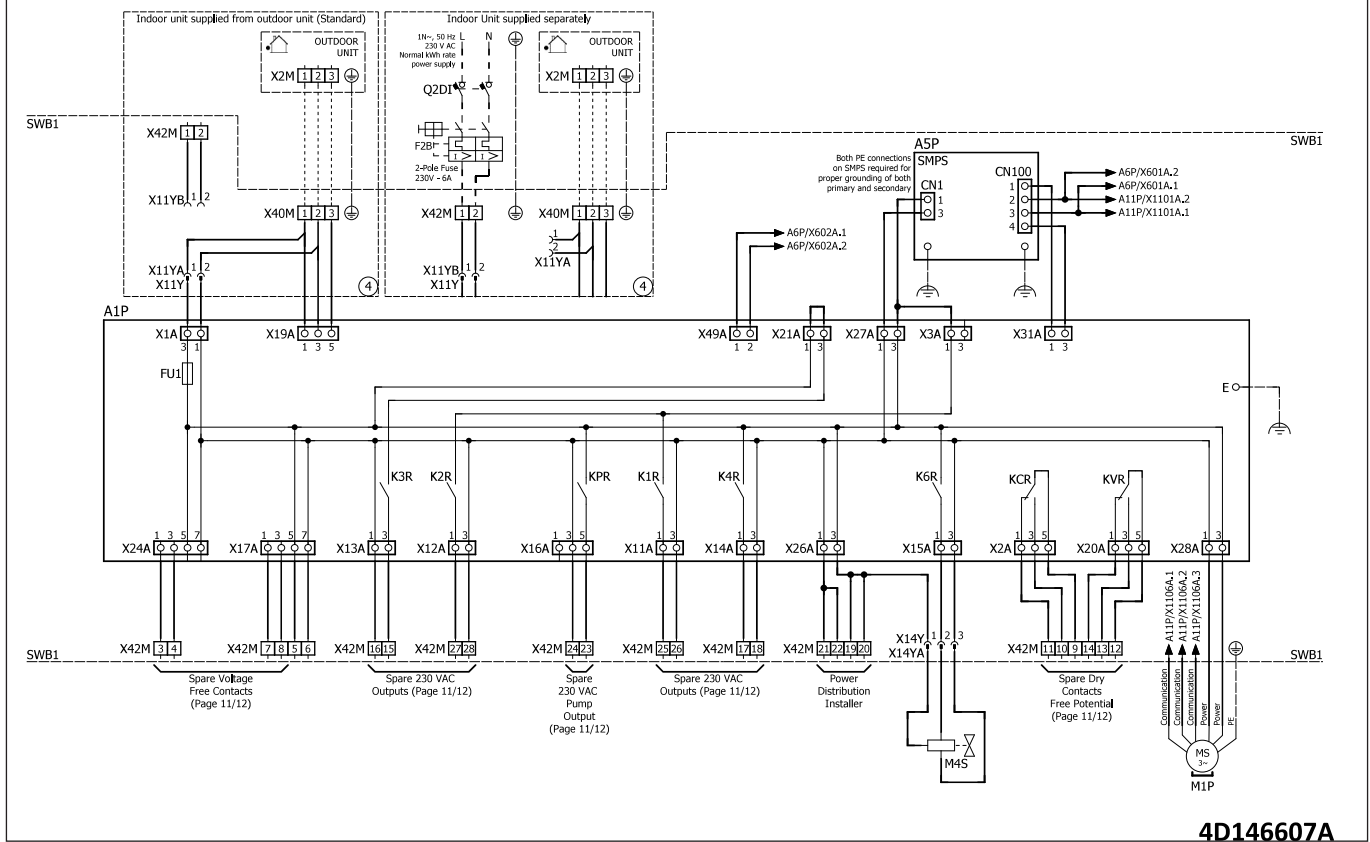

4D146607A

EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

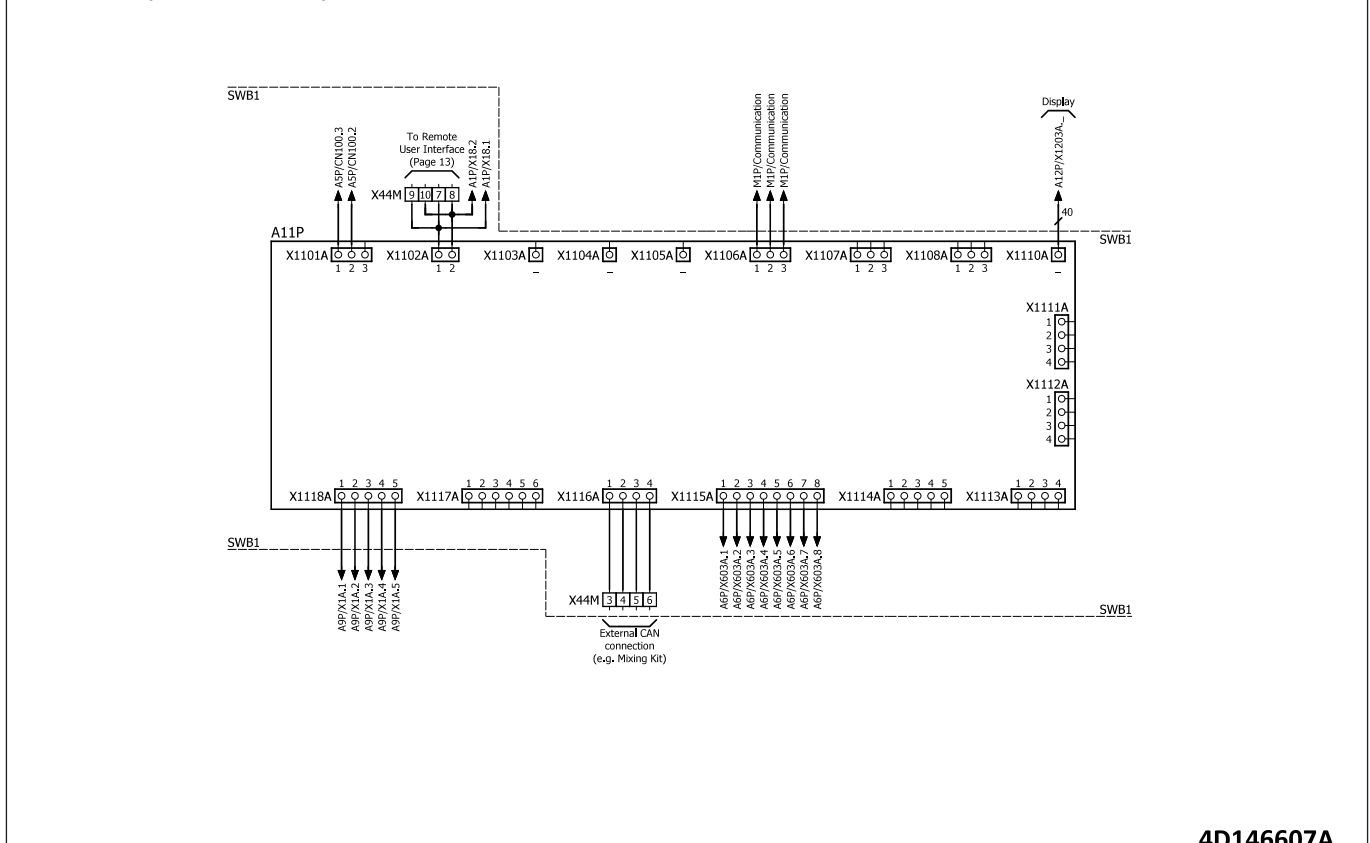


4D146607A

# 8 Wiring diagrams

## 8 - 2 Wiring Diagrams - Hydro Module


EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

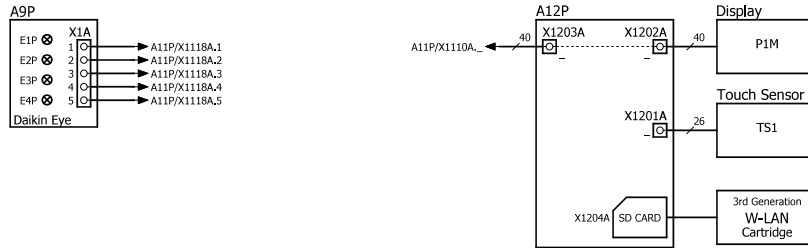

4D146607A

EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

### Connection Possibilities for X42M (Page 1/2)

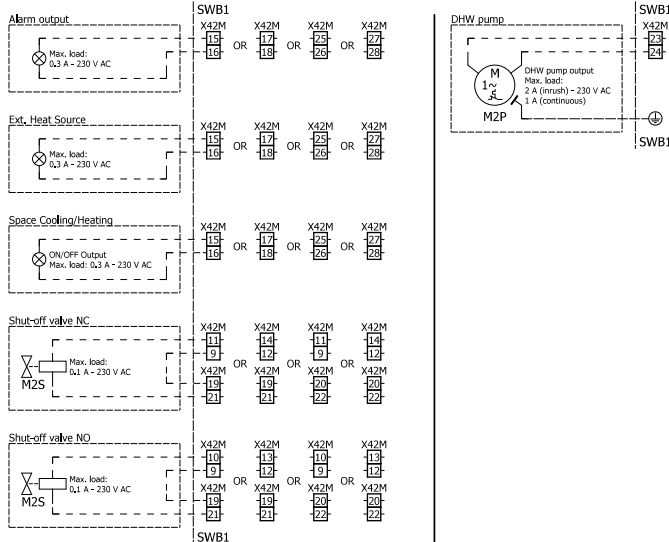

X42M Ports	Description	Max No. of wires per position
1	Alternative Power Supply - L (230 VAC)	1
2	Alternative Power Supply - N (230 VAC)	1
3	Input 1 Room Thermostat 1 (Voltage Free)	1
4	Input 2 Room Thermostat 1 (Voltage Free)	1
5	L Room Thermostat (1 & 2)	2
6	N Room Thermostat (1 & 2)	2
7	Input 1 Room Thermostat 2 (Voltage Free)	1
8	Input 2 Room Thermostat 2 (Voltage Free)	1
9	Spare Dry Contact Free Potential 1 - COM	1
10	Spare Dry Contact Free Potential 1 - NO	1
11	Spare Dry Contact Free Potential 1 - NC	1
12	Spare Dry Contact Free Potential 2 - COM	1
13	Spare Dry Contact Free Potential 2 - NO	1
14	Spare Dry Contact Free Potential 2 - NC	1
15	Spare 230 VAC Output 1 (NO)	1
16	Spare 230 VAC Output 1 (N)	1
17	Spare 230 VAC Output 2 (NO)	1
18	Spare 230 VAC Output 2 (N)	1
19	Power Distribution Installer - L (230 VAC)	2
20	Power Distribution Installer - L (230 VAC)	2
21	Power Distribution Installer - N (230 VAC)	2
22	Power Distribution Installer - N (230 VAC)	2
23	Spare 230 VAC Output Pump (NO)	1
24	Spare 230 VAC Output Pump (N)	1
25	Spare 230 VAC Output 3 (NO)	1
26	Spare 230 VAC Output 3 (N)	1
27	Spare 230 VAC Output 4 (NO)	1
28	Spare 230 VAC Output 4 (N)	1
29	HV Smart Grid 1 - L (230 VAC)	1
30	HV Smart Grid 1 - N (230 VAC)	1
31	HV Smart Grid 2 - L (230 VAC)	1
32	HV Smart Grid 2 - N (230 VAC)	1

Note:  
 1. For Ports 3-4 and 7-8: Only ON/OFF voltage free contacts  
 2. Terminal combinations can only be used for one option.



4D146607A

# 8 Wiring diagrams

## 8 - 2 Wiring Diagrams - Hydro Module

EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

Connection Possibilities for X42M (Page 2/2)

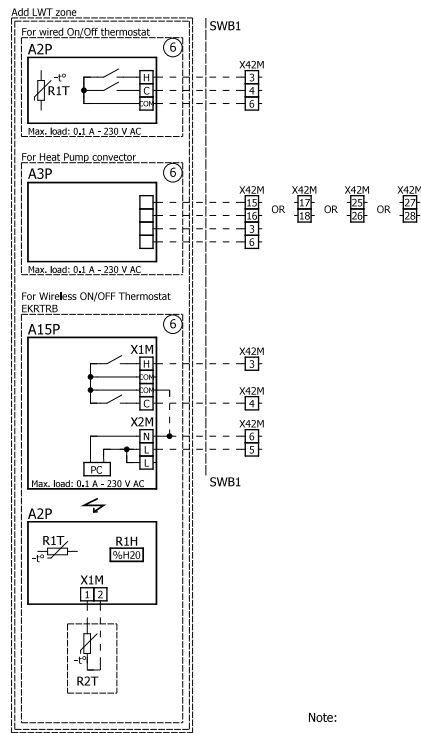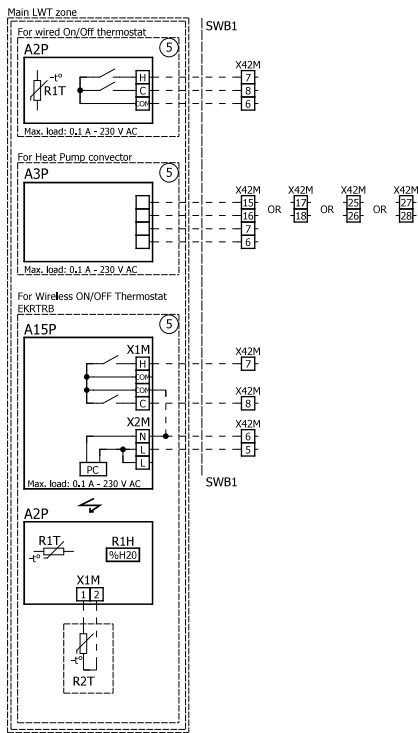


Note:  
 Refer to page 10 of the Wiring Diagram for Terminal Block designation legend.

4D146607B

EPVX10A4V / EPVX10A9W / EPVX10UA4V  
 EPVX14A4V / EPVX14A9W / EPVX14UA4V

Possible connections for X44M / X45M

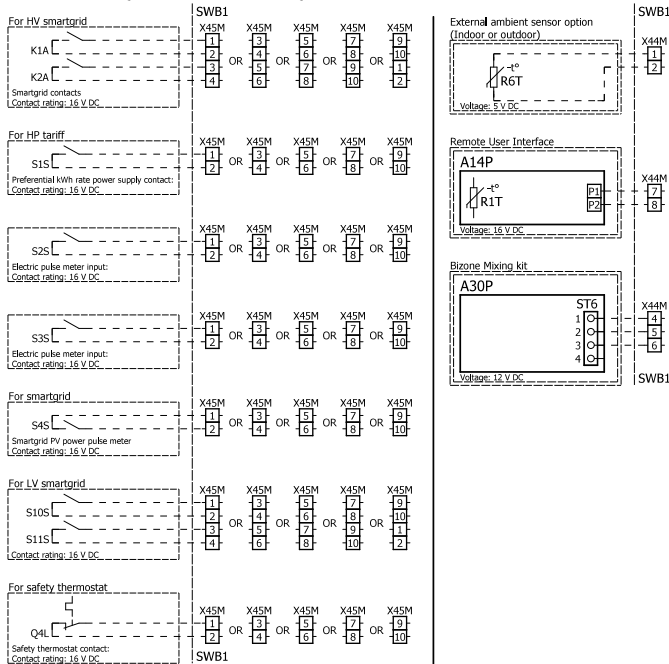

X44M Ports	Description	Max No. of wires per position
1	External Thermistor	1
2	External Thermistor GND	1
3	CAN Bus VCC	1
4	CAN Bus High	1
5	CAN Bus Low	1
6	CAN Bus GND	1
7	P1 - 1	1
8	P2 - 1	1
9	P1 - 2	1
10	P2 - 2	1

X45M Ports	Description	Max No. of wires per position
1	Spare Voltage Free Contact NO 1	1
2	Spare Voltage Free Contact GND 1	1
3	Spare Voltage Free Contact NO 2	1
4	Spare Voltage Free Contact GND 2	1
5	Spare Voltage Free Contact NO 3	1
6	Spare Voltage Free Contact GND 3	1
7	Spare Voltage Free Contact NO 4	1
8	Spare Voltage Free Contact GND 4	1
9	Spare Voltage Free Contact NO 5	1
10	Spare Voltage Free Contact GND 5	1


- Notes:
1. Recommended to use High Grade Contact material
  2. For Ports 1 to 10 of X45M: Only ON/OFF voltage free contacts
  3. Terminal combinations can only be used for one option.

4D146607A

# 8 Wiring diagrams


## 8 - 3 Power Supply, Back-up Heater

**EPVX10A4V / EPVX10A9W / EPVX10UA4V**  
**EPVX14A4V / EPVX14A9W / EPVX14UA4V**

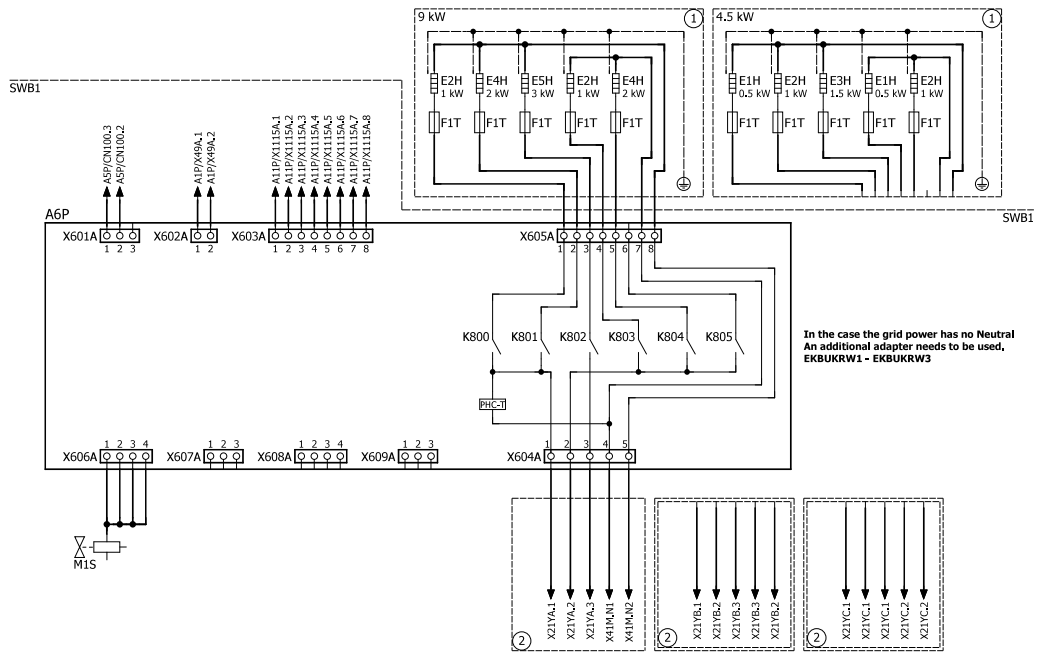

**4D146607A**

**EPVX10A4V / EPVX10A9W / EPVX10UA4V**  
**EPVX14A4V / EPVX14A9W / EPVX14UA4V**

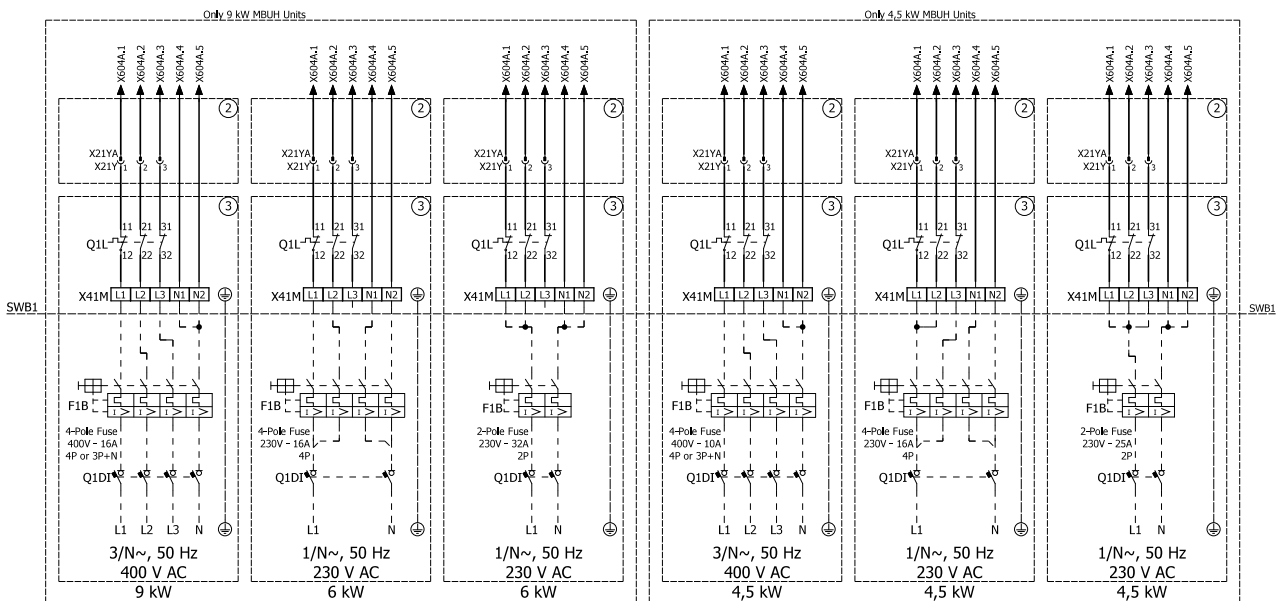

**4D146607B**




# 9 External connection diagrams

## 9 - 1 External Connection Diagrams

EPVX10A4V  
 EPVX10A9W  
 EPVX10UA4V  
 EPVX14A4V  
 EPVX14A9W  
 EPVX14UA4V

Electrical connection diagram Altherma 4 Floorstanding For more details please check unit wiring

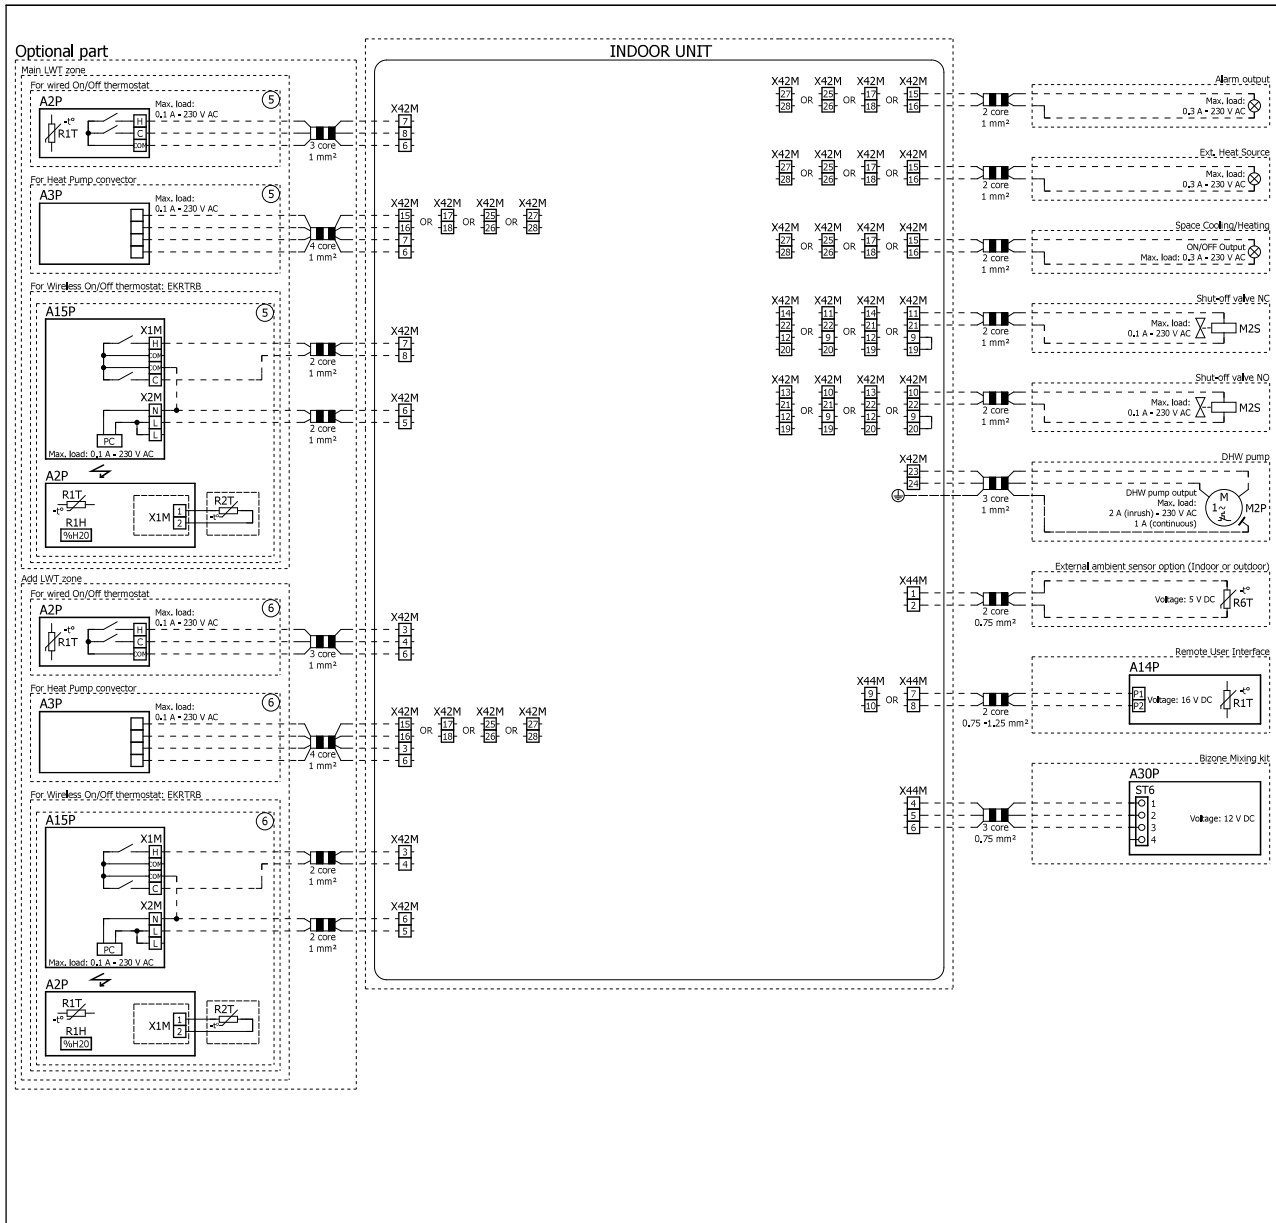



4D152933B

# 10 Installation

## 10 - 1 Installation Method

10

- EPVX10A4V
- EPVX10A9W
- EPVX10UA4V
- EPVX14A4V
- EPVX14A9W
- EPVX14UA4V

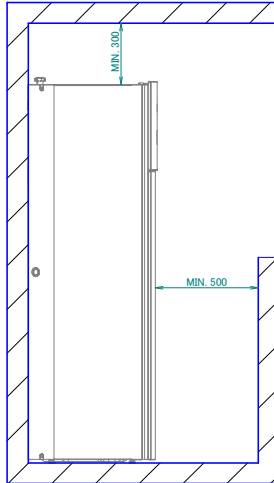


3D154673

# 11 Hydraulic performance

## 11 - 1 Static Pressure Drop Unit

EPVX10A4V  
 EPVX10A9W  
 EPVX10UA4V

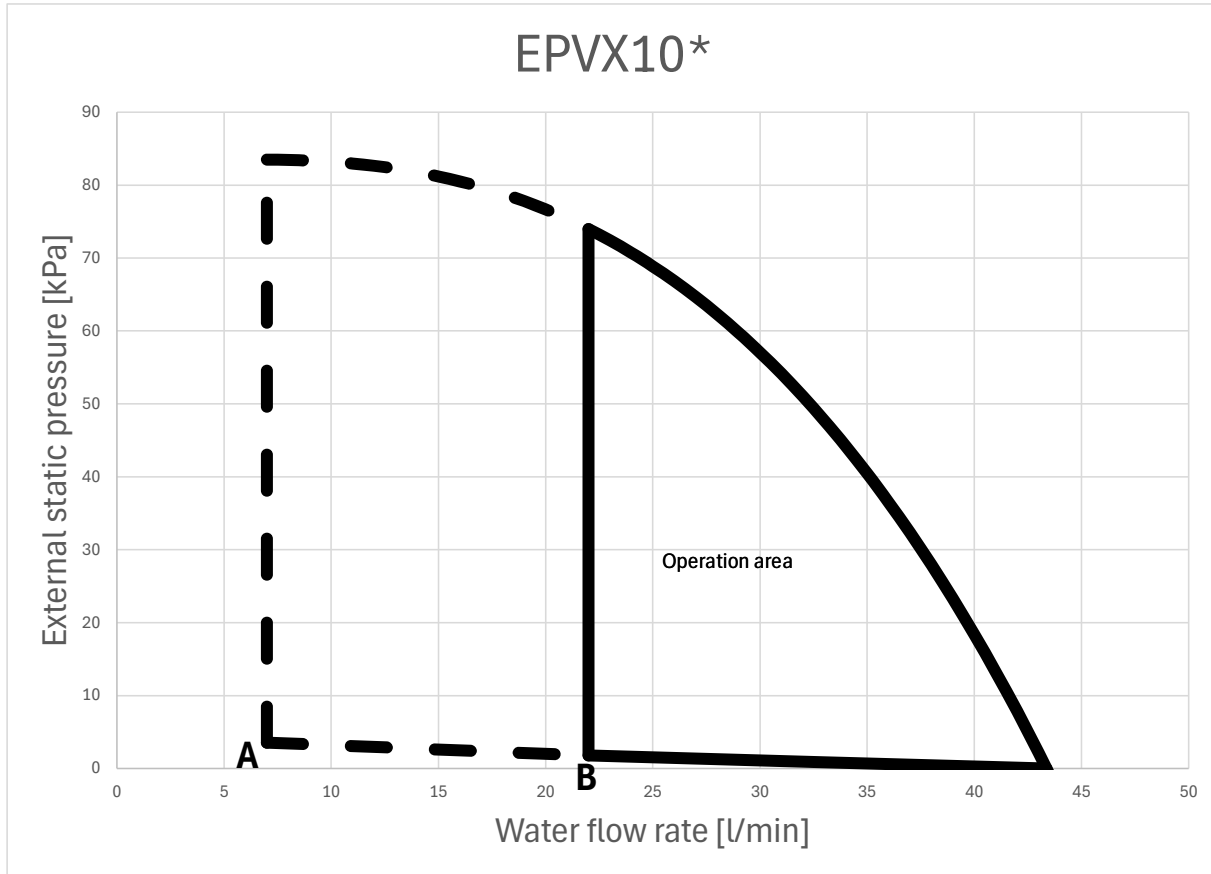

- A Minimum water flow rate during normal operation
- B Minimum water flow rate during defrost/backup heater operation

Operation area is extended to lower flow rates only in case the unit operates with heat pump only.

See dashed lines

Notes

1. Selecting a flow outside the operating area can damage the unit or cause the unit to malfunction. See also the minimum and maximum allowed water flow range in the technical specifications.
2. Make sure water quality complies with EU Directive ·2020/2184·
3. Unit "External static pressure" includes the shut-off valve


4D154676

# 11 Hydraulic performance

## 11 - 1 Static Pressure Drop Unit

11

EPVX14A4V  
 EPVX14A9W  
 EPVX14UA4V

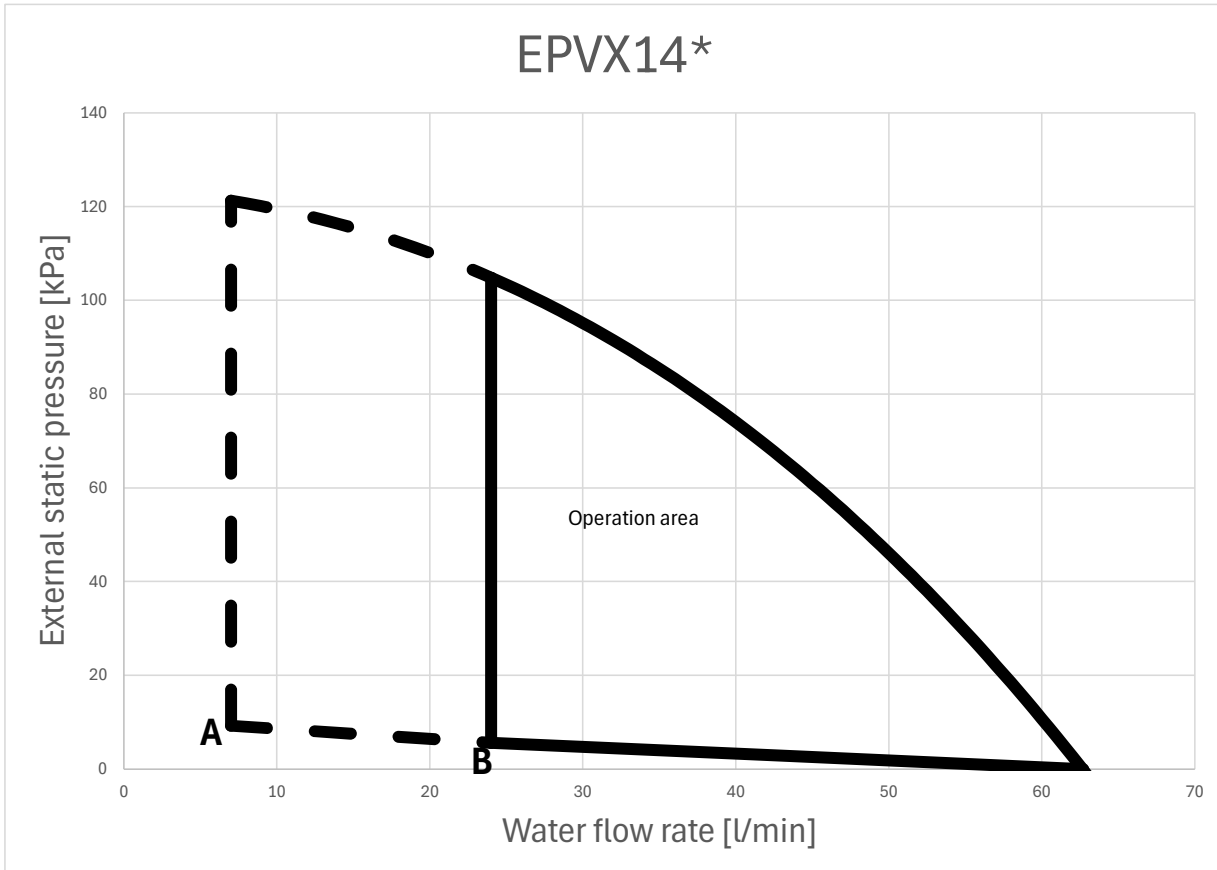


- A Minimum water flow rate during normal operation
- B Minimum water flow rate during defrost/backup heater operation

Operation area is extended to lower flow rates only in case the unit operates with heat pump only.  
 See dashed lines

Notes

1. Selecting a flow outside the operating area can damage the unit or cause the unit to malfunction.  
 See also the minimum and maximum allowed water flow range in the technical specifications.
2. Make sure water quality complies with EU Directive ·2020/2184·
3. Unit "External static pressure" includes the shut-off valve

4D154677



EEDEN25

03/2025



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.